


LOVET-210

40kW VET X-Ray System

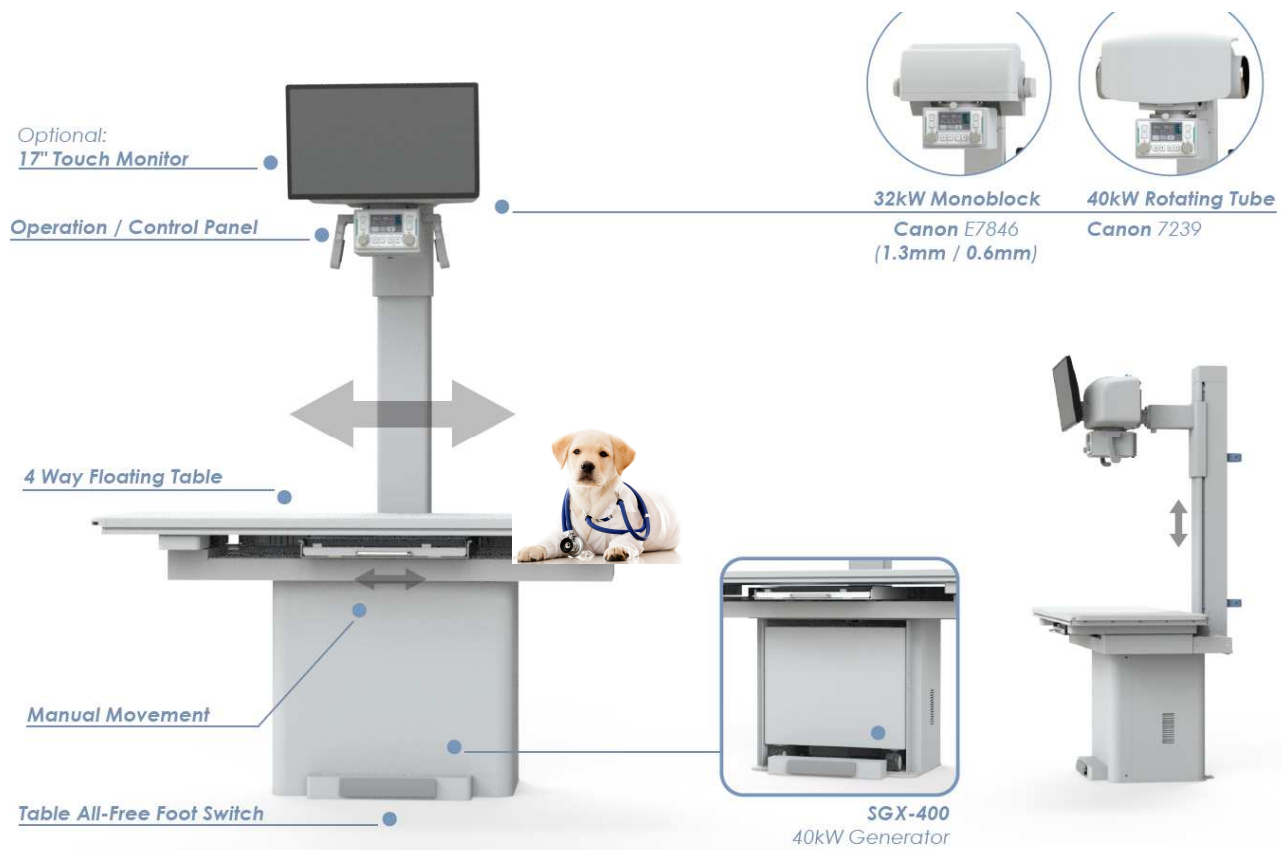

■ Specifications

Type		40 kW (LOVET-210) Veterinary Radiography
Max Power		32kW or 40 kW
Input Power		120V~/220-240V~, (50/60) Hz, 10A
Tube Type		32kW Monoblock or 40kW Rotating Tube
X-Ray Tube		Canon
		32kW: Focal 1.3 mm / 0.6 mm
		40kW: Focal 2.0 mm / 1.0 mm
RAD	kV	40 kV ~ 125 kV (1kV Step)
	mA	60 ~ 500 mA
	mAs	0.5 mAs ~ 400 mAs
Collimator		* Digital servo motor blade control * Ultrasonic SID measurement * 4.3" touch display * kV, mAs, APR control
Movement		Fixed & Floating Table
Recommendation (Optional)		17" LCD Monitor
		PC - Custom Installation

■ Advantages

1. **Low table top: Easy with heavy dogs.**
 - Don't need to lift heavy dogs by force because the table goes low enough.
2. **Adjustable SID: The SID is adjustable from 70 cm to 125 cm.**
 - The shorter the SID is, the lower the dose.
3. **Tube rotation + Tube stand slide: To allow various examinations required.**
 - The tube can be rotated to $\pm 95^\circ$ and tube stand can be moved either to left or right to allow users to have more options for positioning animals and performing various examinations.